NOTES:
1. MATERIALS AND FINISHES:
   BODY - BRASS, GOLD PLATED
   CONTACT - BERYLLIUM COPPER, GOLD PLATED
   INSULATOR - PTFE
2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM
   B. FREQUENCY RANGE: DC - 6 GHz
   D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
   A. QUANTITY: SINGLE PACK
   B. MARKING: BAG TO BE MARKED
      "AMPHENOL RF, 908-22100, AND DATE CODE (YYWW)"

908-22100	REVISIONS				
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	OFFICIAL ENG. RELEASE TO MFG.	03-09-95	40439	GT/RV
	B	1) RE-DRAWN ON PRO/E, 2) .023 WAS: .014, 3) .140±.003 WAS: .14, 4) .180±.010 WAS: .18	7/29/96	41433	BCG
	C	ADD COPLANAR REF NOTE	2/21/01	43684	CPM
	D	ADDED PCB SOLDER PAD, CHANGED GOLD PLATING CODE	10/3/14	49828	JTS

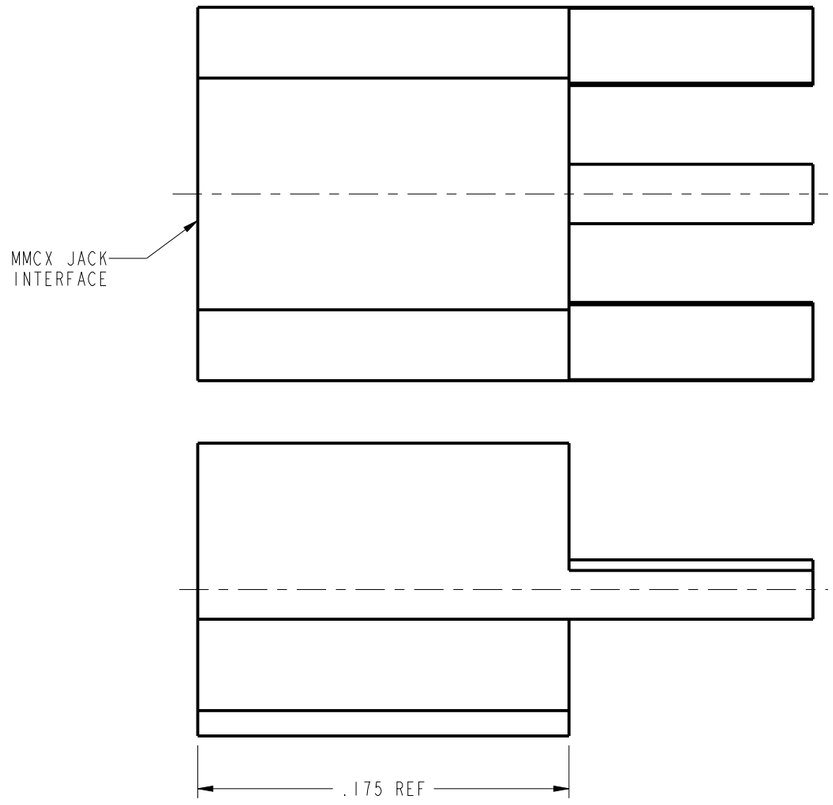

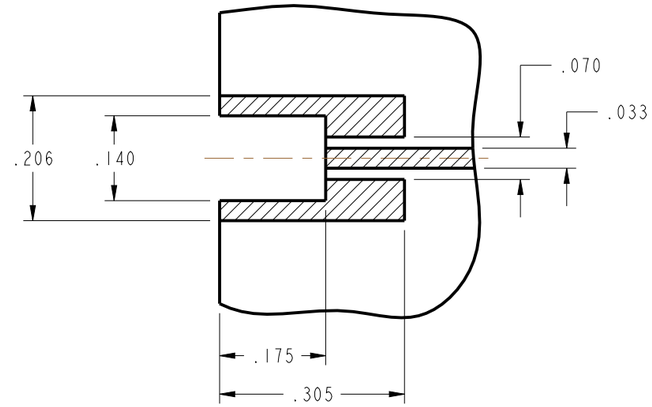

RECOMMENDED
PCB LAYOUT

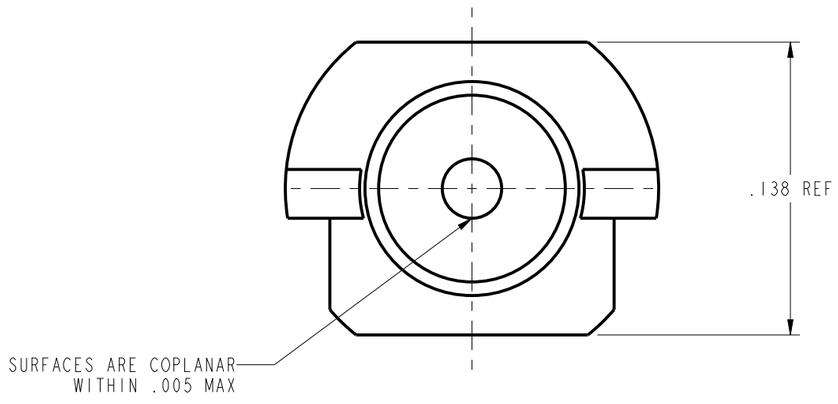

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
2 PLACE DECIMAL ±.015 (0,381 mm) | 3 PLACE DECIMAL ±.005 (0,127 mm) | ANGLES ± 1°

MATERIAL

REFERENCE
EAR 964566-0
615X-1323-100
GEN# ASSYF3_MMCX
GEN# PCB_CUTOUT

DRAWN	B. GLEISSNER	DATE 20-Jun-96
ENGINEER	G. TILTON	DATE 21-Jun-95
APPROVED	R. VACARRO	DATE 02-Mar-95

TITLE
MMCX JACK
EDGE LAUNCH

Amphenol RF
Danbury, CT, USA
Tainan, Taiwan
Shenzhen, China
www.amphenolrf.com

SCALE: 14.0:1 | SHEET 2 OF 2

CAD FILE	CODE ID	DWG SIZE	DRAWING NO.	REV
I:\MMCX\908-22100	74868	B	908-22100	D