

THIS COPY IS PROVIDED ON A	A RESTRICTED BASIS AND IS NOT TO BE U	SED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	
Wire Size	6 AWG	27±.02 DIA
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	.27±.02
Wire Strip Length	1-1/8 in.	-48±.04 PANDUIL (C.G. 14.1AW)
Stud Size	1/4 in.	.48±.04
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.25±.0450±.0213 REF.
UL Temperature Rating	90° C	63±.02
C.S.A Certified Wire Connector	Yes	2.49±.06
Panduit Color Code on Barrel	BLUE	
Panduit Die Index No. on Barrel	P24	
Alternate Industry Die Index No. ()	(7)	Wire inspection window—



on Barrel



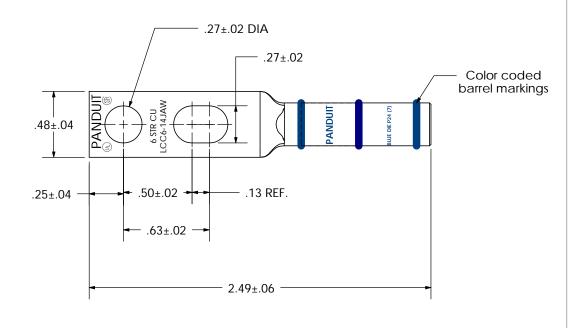

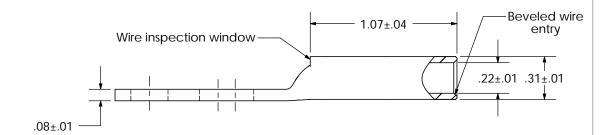

REV	DATE	BY	СНК	DESCRIPTION	ECN	N/A DRAWING NO / CAD FILE LCC6-14JAW-CUST
00	9/04	JHNU	CSH	RELEASED	12021 ^C	1Copper Lug - Slotted Two-Hole, Long Barrel with Window
						LCC6-14JAW-L
						CORP. TINLEY PARK, ILLINOIS