


Size: (402 mm x 98 mm x 90 mm)
15.83 x 3.86 x 3.54 inches

- Features:** cross flow blower
- Operating voltage (VAC):** 120 or 230
- Operating temp:** -40° to 70° C
- Construction:** steel frame with aluminum impeller
- Bearing option:** ball bearing
- Motor:** permanent split capacitor
- Connection:** 22 AWG lead wires
- Protection:** thermal
- Insulation:** Class B

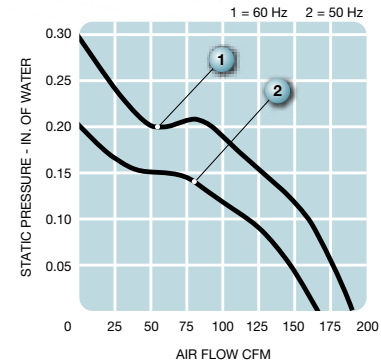

| Model No. | Rated Voltage V | Freq. HZ | Input Power W | Rated Cur. A | Locked Cur. A | Speed RPM | Air Volume | | Max. Static Pressure (H ₂ O) | | Sound Noise dbA | Weight kg |
|-----------------------|-----------------|----------|---------------|--------------|---------------|-----------|----------------------|-----|---|------|-----------------|-----------|
| | | | | | | | M ³ /Min. | CFM | MM | INCH | | |
| UF6030CBA12H-L | 120 | 50 | 35 | 0.33 | 0.46 | 2600 | 5.0 | 177 | 5.0 | 0.20 | 50 | 2.0 |
| | 120 | 60 | 37 | 0.33 | 0.46 | 3000 | 5.5 | 195 | 7.5 | 0.30 | 53 | 2.0 |
| UF6030CBA23H-L | 230 | 50 | 35 | 0.17 | 0.22 | 2600 | 5.0 | 177 | 5.0 | 0.20 | 50 | 2.0 |
| | 230 | 60 | 37 | 0.17 | 0.22 | 3000 | 5.5 | 195 | 7.5 | 0.30 | 53 | 2.0 |