

BLUE

BLACK

GREY

Material:


- Cable: Jacket Yellow (Y-09#) PVC UL2678 30AWG (1/0.245 BC)*80C PH:0.635mm, L=480±mm
- Connectors (3): ATA 80P, Pin G/F colored keys (Blue, Gray & Black) 20pin w/Nose
- Connectors (2): ATA-80P, Black (SR & PM)

Electrical:

- 100% short, open, miswire test
- Conductor resistance: 2Ω Max.
- Insulation Resistance: 5Ω Min.
- Dielectric test: DC 300V

WIRING DIAGRAM:

P1	1	2+19+22+24+26+30+40	3	4	5	~	18	NC	21	~	28	~	34	~	38	39
P2	1	2+19+22+24+26+30+40	3	4	5	~	18	NC	21	~	NC	~	34	~	38	39
P3	1	2+19+22+24+26+30+34+40	3	4	5	~	18	NC	21	~	28	~		~	38	39
		RED	YELLOW													

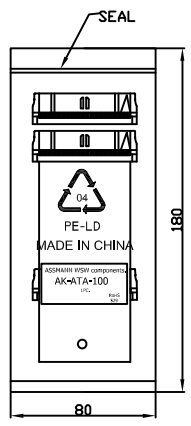

Unit: mm



Scale	Free							Date	Name	Title Flat Ribbon cable Ultra ATA HDD 100Mbps, .46M	
TOLERANCE								Drawn	26.08.16		Wilson
X.	±0.3							Approved	26.08.16	Groll	
X.X	±X										
X.XX	±X										
DIM	TOL										
X.°	±X°										
X.X°	±X°										
Angle	TOL	Id.	Modification	Date	Name	 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us				Drawing-No.	rev00
										Replace	Sheet