

Housing - HC-D 15-TFL-66/O1STM25G - 1645176


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON sleeve housing, D15, for single locking latch, height: 66 mm, without 1 x M25 support, straight cable outlet

RoHS

Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 960049
GTIN	4017918960049
Weight per Piece (excluding packing)	160.000 g
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Height	66 mm
Width	36 mm
Length	63 mm

Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-D15, A10
Size	D15
Housing type	Sleeve housing

Housing - HC-D 15-TFL-66/O1STM25G - 1645176

Technical data

General


Locking type	for single locking latch
No. of cable outlets	1
Cable exit	straight
Screw connection	none
Type of the screw connection	1x M25
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

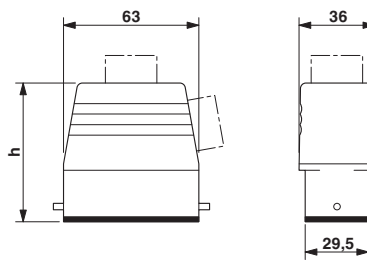

Approvals

Approvals

Approvals

EAC / GL

Ex Approvals

Approval details

EAC 7500651.22.01.00246

Housing - HC-D 15-TFL-66/O1STM25G - 1645176

Approvals

GL <http://www.gl-group.com/newbuilding/approvals/index.html> 6196614
