


THIS DRAWING IS UNPUBLISHED  
 RELEASED FOR PUBLICATION 2000  
 (C) COPYRIGHT 2000 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J	PLATING CHANGE AT AREA F	21OCT2014	KJK	JK


POS. PER ROW	L +0.3 -0.6	PART NUMBER	POS. PER ROW	L +0.3 -0.6	PART NUMBER	
-	-	-	26	66.04	2- 827 780-6	
2	5.08	827 780-2	27	68.58	2- -7	
3	7.62	-3	28	71.12	2- -8	
4	10.16	-4	29	73.66	2- -9	
5	12.70	-5/2	30	76.20	3- -0	
6	15.24	-6/2	31	78.74	3- -1	
7	17.78	-7/2	32	81.28	3- -2	
8	20.32	-8/2	33	83.82	3- -3	
9	22.86	-9	34	86.36	3- -4	
10	25.40	1-	-0/2	35	88.90	3- -5
11	27.94	1-	-1	36	91.44	3- -6
12	30.48	1-	-2/2	37	93.98	3- -7
13	33.02	1-	-3	38	96.52	3- -8
14	35.56	1-	-4	39	99.06	3- -9
15	38.10	1-	-5	40	101.60	4- -0
16	40.64	1-	-6	41	104.14	4- -1
17	43.18	1-	-7	42	106.68	4- -2
18	45.72	1-	-8	43	109.22	4- -3
19	48.26	1-	-9	44	111.76	4- -4
20	50.80	2-	-0/2	45	114.30	4- -5
21	53.34	2-	-1	46	116.84	4- -6
22	55.88	2-	-2/2	47	119.38	4- -7
23	58.42	2-	-3	48	121.92	4- -8 OBSOLETE 1
24	60.96	2-	-4	49	124.46	4- -9
25	63.50	2-827 780-5	-50	127.00	5- 827 780 -0 OBSOLETE 2	

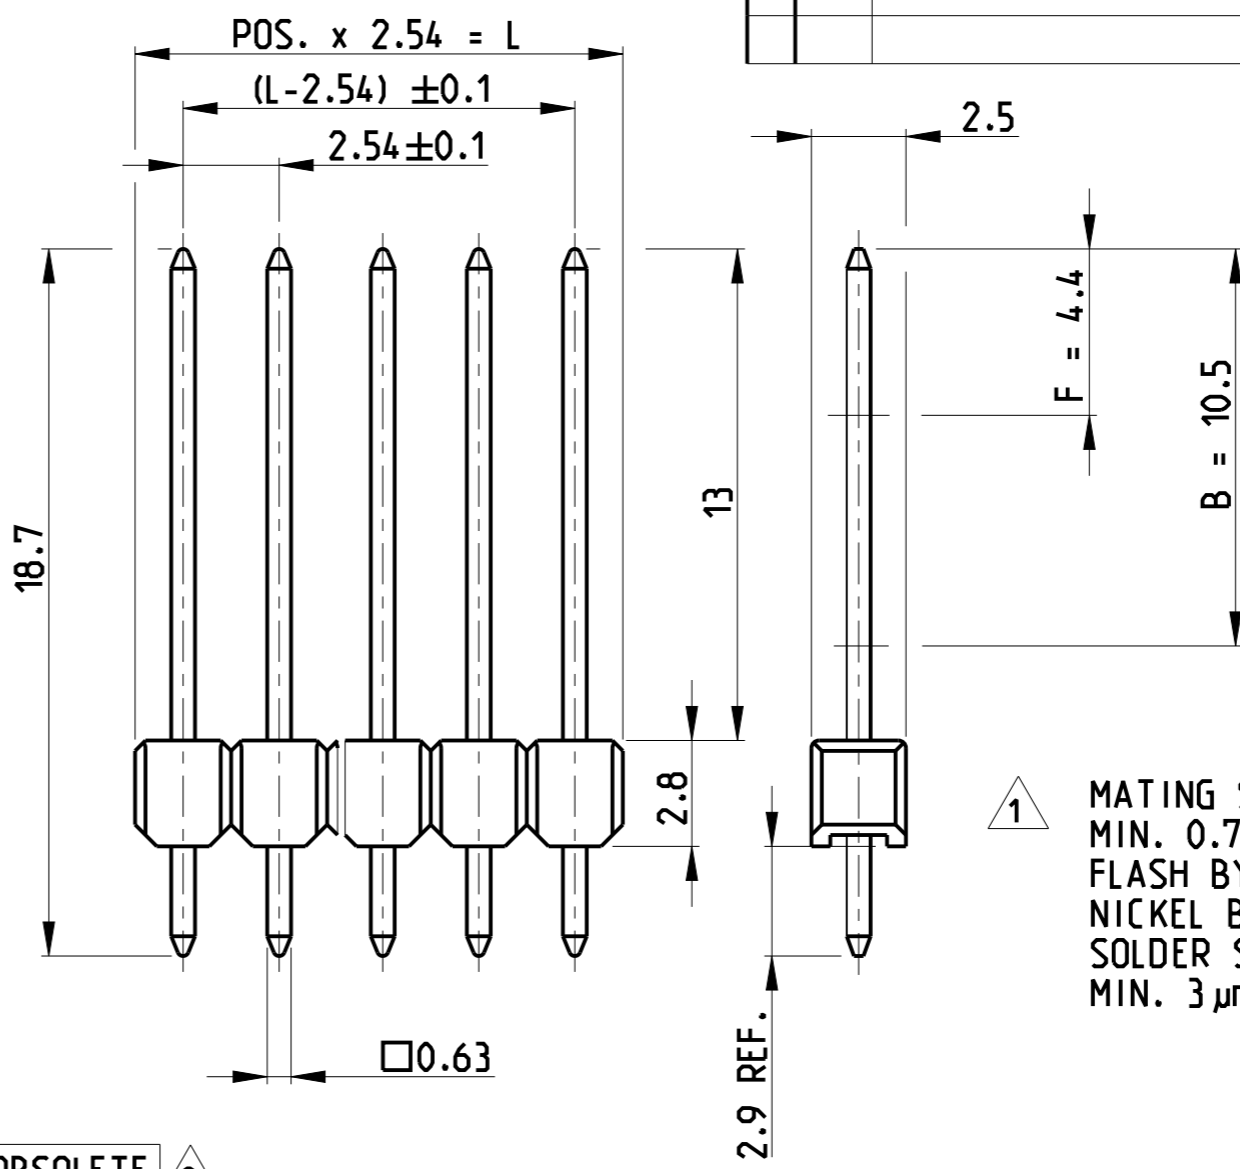

1 MATING SIDE:  
 MIN. 0.7 µm PdNi + MIN. 0.1 µm GOLD  
 FLASH BY AREA "F" OVER 1.27 µm  
 NICKEL BY AREA "B"  
 SOLDER SIDE:  
 MIN. 3 µm TIN OVER 1.27 µm NICKEL

2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING  
 PER D.RENAUD/D.SINISI

PC BOARD LAYOUT  
 LEITERPLATTENANSCHLUSSBILD

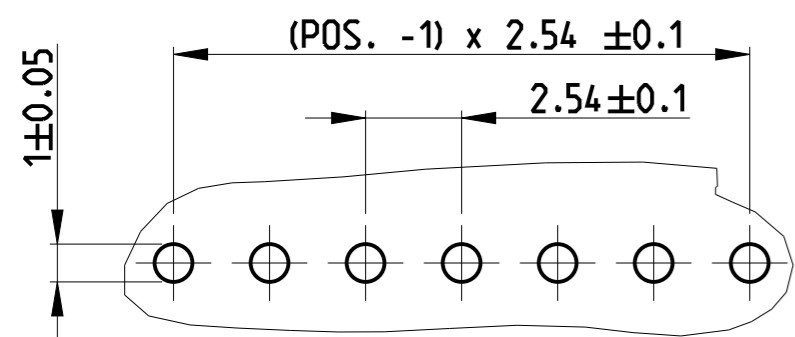

REMARK	DESCRIPTION BEZEICHNUNG	MATERIAL	ITEM NUM.
1	CONTACT PIN KONTAKTSTIFT	CuSn	2
COLOUR. GREEN	PIN HOUSING STIFTGEHAEUSE	PBT	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11JAN2006 G.ACKERMANN		TE Connectivity	
DIMENSIONS: mm		CHK - M.SCHAARSCHMIDT			
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2mm		APVD - G.FELDMEIER		NAME AMPMODU II PIN HEADER SINGLE ROW	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-18012		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL SEE TABLE		FINISH SEE TABLE		A3 00779 C-827780	
		WEIGHT -		SCALE 5:1 SHEET 1 OF 1 REV J	
Customer Drawing					