

Valve connectors - SACC-VB-3CON-M12/CI-1L-SV 110V - 1452301

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Valve connector, 3-pos., construction CI, 1 LED, with protective circuit, screw connection, M12 cable gland

The illustration shows a version of the product in a 24 V design



Key commercial data

| | |
|--------------------------------------|----------|
| Packing unit | 1 1 |
| Weight per Piece (excluding packing) | 20.0 GRM |
| Custom tariff number | 85366990 |
| Country of origin | Hungary |

Technical data

Dimensions

| | |
|-------------------|---------------|
| External diameter | 4 mm ... 6 mm |
|-------------------|---------------|

Ambient conditions

| | |
|---------------------------------|-------------------------------|
| Ambient temperature (operation) | -25 °C ... 60 °C (valve plug) |
| Degree of protection | IP65 |

General

| | |
|------------------------------|------------|
| Rated current at 40°C | 1.5 A |
| Rated voltage | 110 V |
| Number of positions | 3 |
| Contact resistance | ≤ 4 MΩ |
| Insulation resistance | > 2 GΩ |
| Status display | Yellow LED |
| Protective circuit/component | Varistor |
| Surge voltage category | II |
| Pollution degree | 3 |

Valve connectors - SACC-VB-3CON-M12/CI-1L-SV 110V - 1452301

Technical data

General

| | |
|-----------------------------|--|
| Connection method | Screw connection |
| Conductor cross section | 0.25 mm ² ... 0.5 mm ² |
| AWG conductor cross section | 24 ... 20 |
| Torque | 1.6 Nm ± 0.2 (Pressure screw) |
| | 0.4 Nm ± 0.4 (Central screw) |
| | 0.2 Nm ± 0.1 (Contact screw) |

Material

| | |
|---|------|
| Inflammability class according to UL 94 | HB |
| Valve plug contact material | CuZn |
| Valve plug contact surface material | CuSn |
| Material housing valve plug | PA |
| Sealing material | NBR |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140815 |
| eCl@ss 4.1 | 27140815 |
| eCl@ss 5.0 | 27143423 |
| eCl@ss 5.1 | 27143423 |
| eCl@ss 6.0 | 27143423 |
| eCl@ss 7.0 | 27449001 |
| eCl@ss 8.0 | 27449001 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC002062 |
| ETIM 5.0 | EC002062 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals

Valve connectors - SACC-VB-3CON-M12/CI-1L-SV 110V - 1452301

Approvals

Approvals

GOST

Ex Approvals

Approvals submitted

Approval details



Accessories

Accessories

Cable by the meter


Sensor/Actuator cable - SAC-3P-100,0-PUR/0,5 - 1457393



Cable ring, PUR black, 3-pos., conductor colors: black 1-2/green-yellow, cable length: 100 m

Drawings

Dimensioned drawing

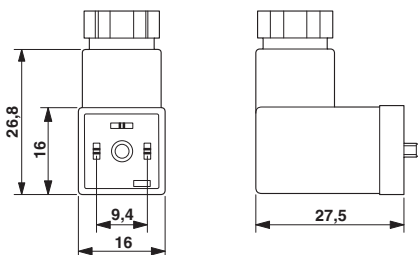

Circuit diagram

