


5332 Series T-1 3/4 Vertical LED Assembly

Description and Features

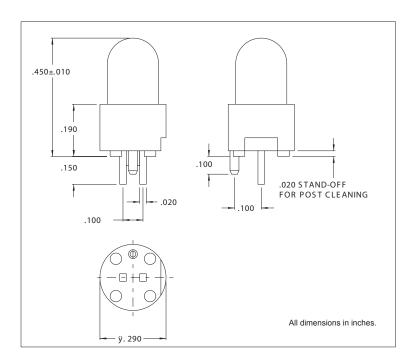

Features

- Block mounting design assures height and side-by-side spacing-alignment saves assembly costs.
- Ultra Brite T-1 3/4 LED lamp-non-diffused high intensity light.
- Press-in mounting pin secures assembly to PC board while beingsoldered.
- Standoffs prevent flux entrapment.
- RoHS Compliant

Housing: Black Nylon, UL94V-O

Note: Alternate LEDs are also available in this package as a standard variation.

Refer to "Mounting Hole Pattern 3.pdf"

Electro-Optical Characteristics and Ratings

Part Number	Emitted Colo r	Typical Intensity	Rated Current	Continuous Forward CurrentMax.	Forward Voltage Typ. Max.		Reverse Breakdown VoltageMin.	Peak Wavelength	Peak Forward Current at 1MS-300PPS
	00101	(mcd)	(mA)	(mA)	(V)	(V)	(V)	(nm)	(A)
5332H1	Red	68	20	60	2.1	3.0	5	650	1.0
5332H5	Green	100	20	60	2.2	3.0	5	563	.09
5332H7	Yellow	160	20	60	2.2	3.0	5	585	1.0

