

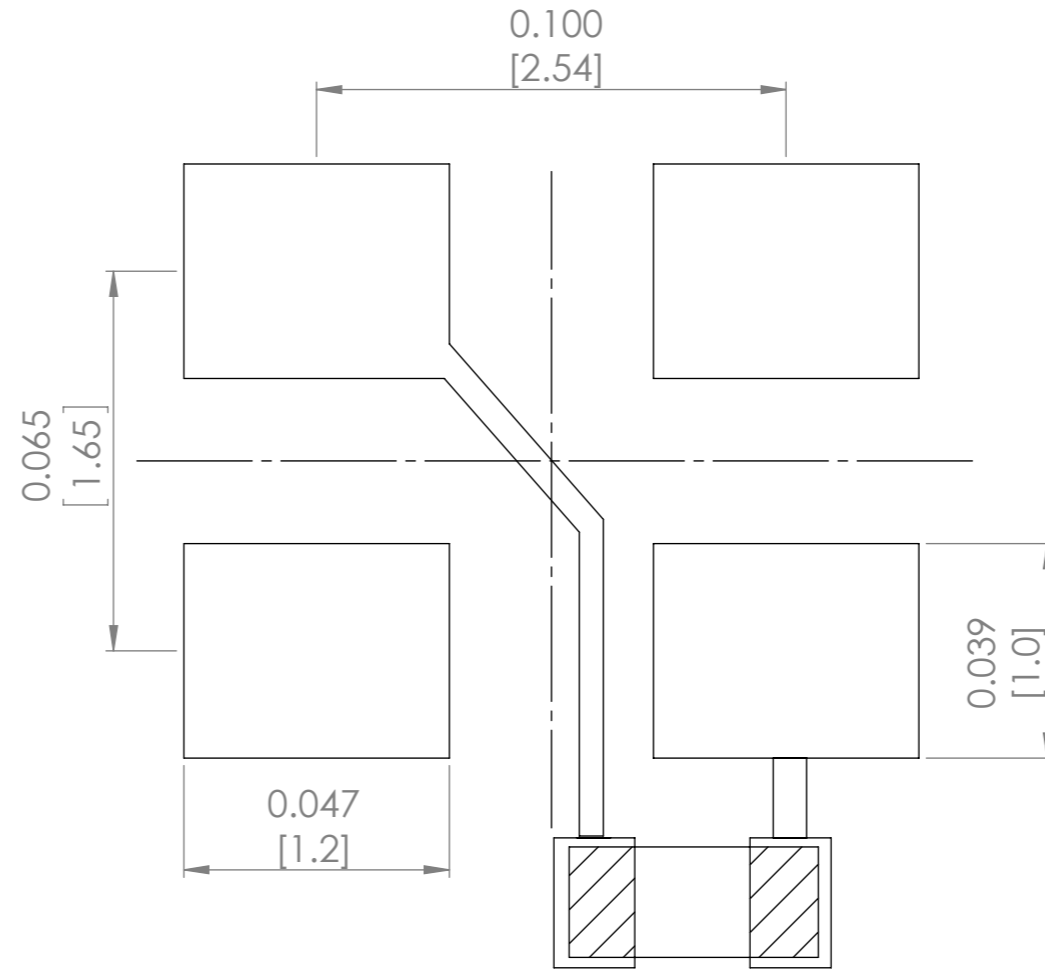
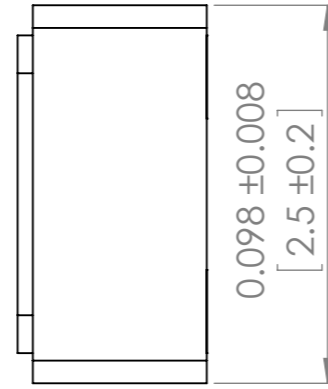
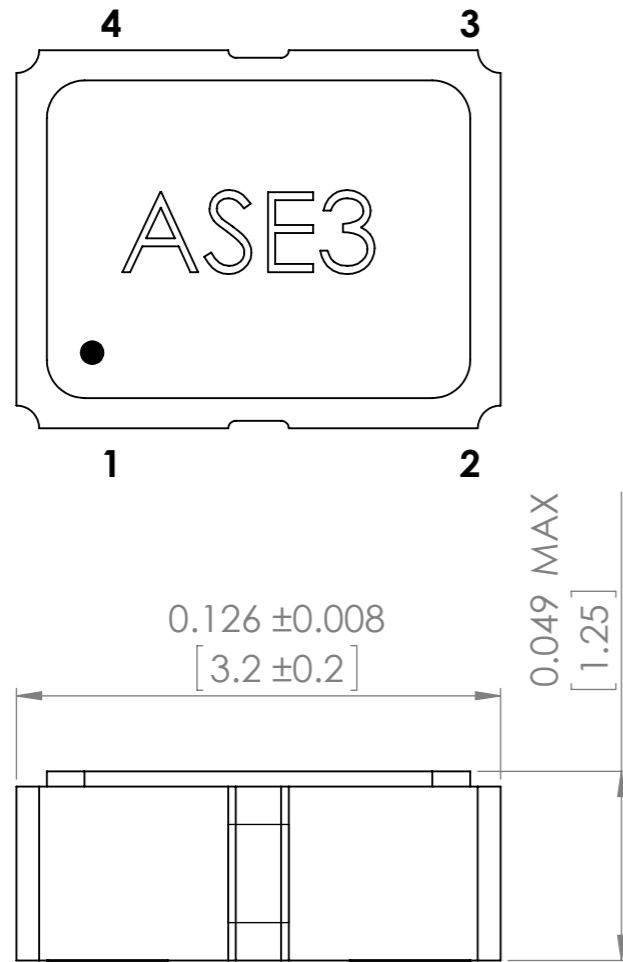
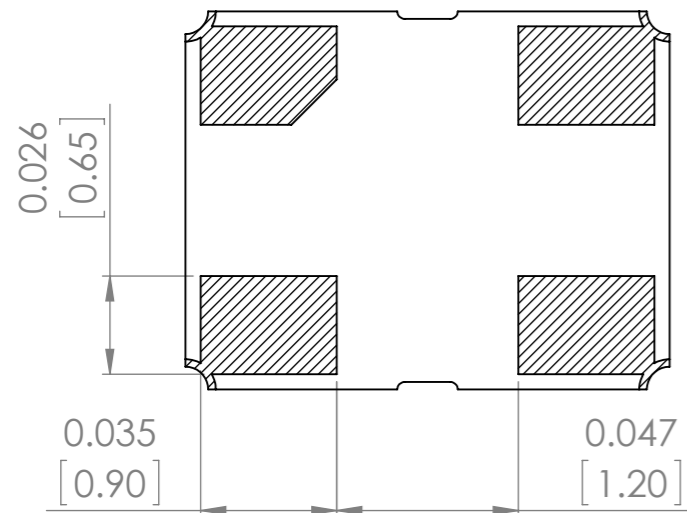


Recommended Land Pattern

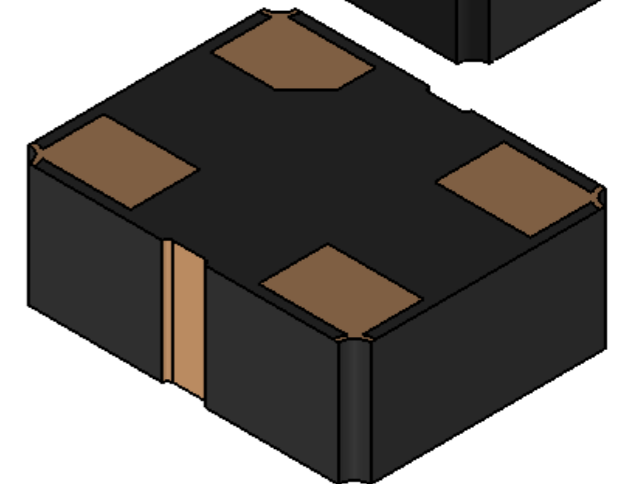


0.01µF

It is recommended to use an approximately 0.01µF bypass capacitor between PIN 2 and PIN 4.

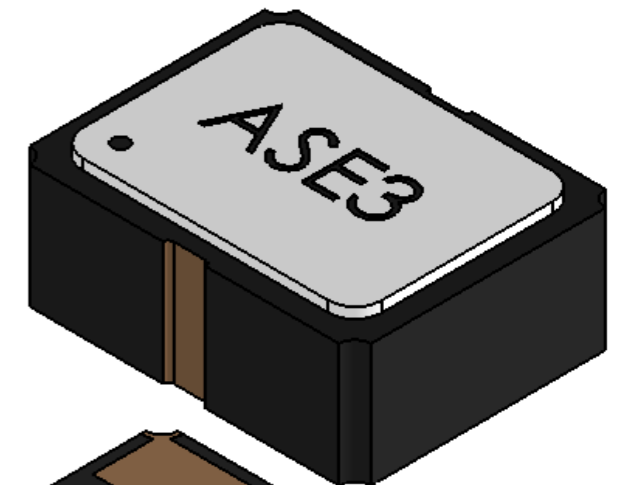

Bottom View

PIN	FUNCTION
1	Tri-state
2	GND/Case
3	Output
4	Vdd

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCH(MM) SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
NAME	SIGNATURE	DATE				 30332 Esperanza, Rancho Santa margarita, California 92688	
DRAWN	SAAZVAT					TITLE: Oscillator	
CHK'D	XXXXXX					DWG NO. ASE3	
APPV'D						A3	
MFG				MATERIAL:		SCALE:20:1	
Q.A				WEIGHT:		SHEET 1 OF 1	